




LED Floor standing light



● BR-FS0007-110W-B01

Features:

- Up lighting use cuttable strip lens, transmittance rate >90%;
- Down lighting use rhombus optical lens, nice color rendering, high uniformity;
- UGR<16, transmittance rate >88%;
- Intelligent touch control mode, 4 modes are optional;
- Compact structure and beautiful design, screw hidden installation;
- Splicing lamp base, saving packaging, easy to transport;

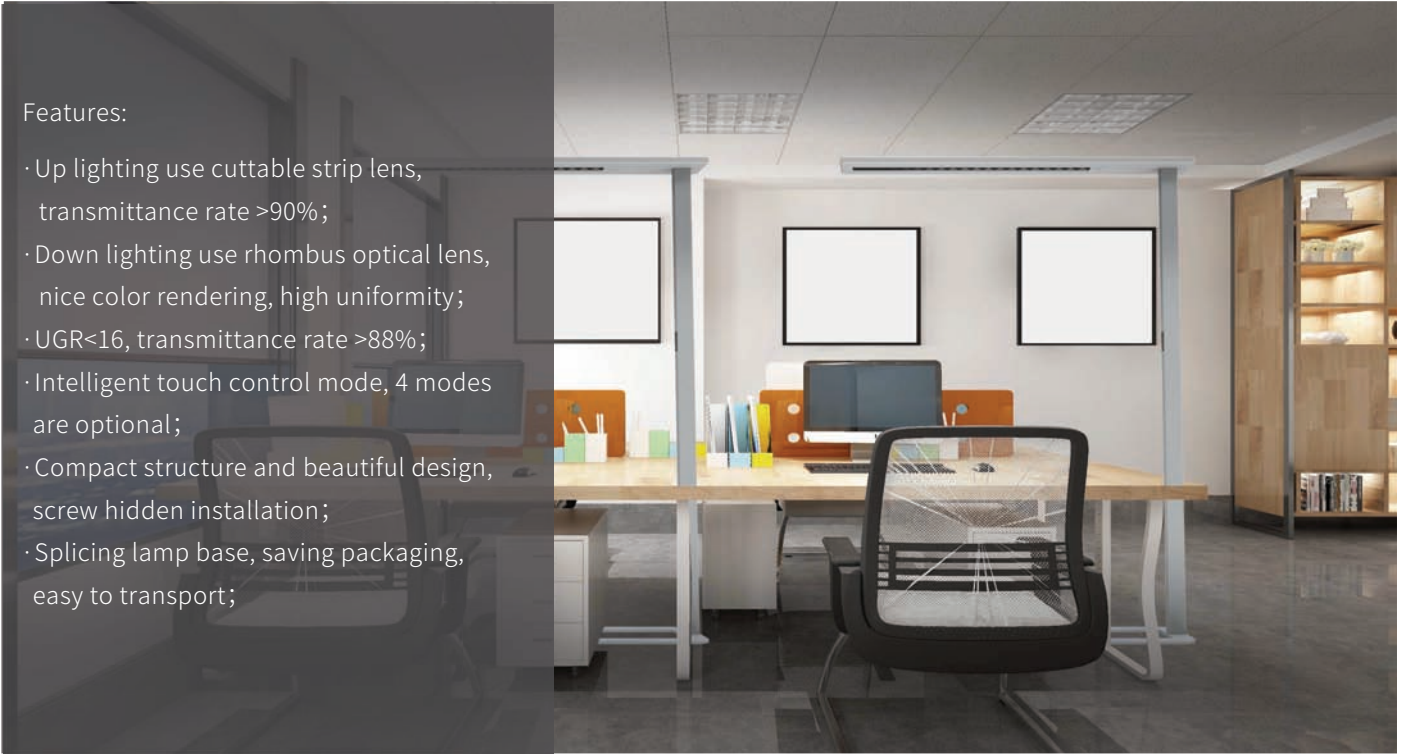

◆ Details' display

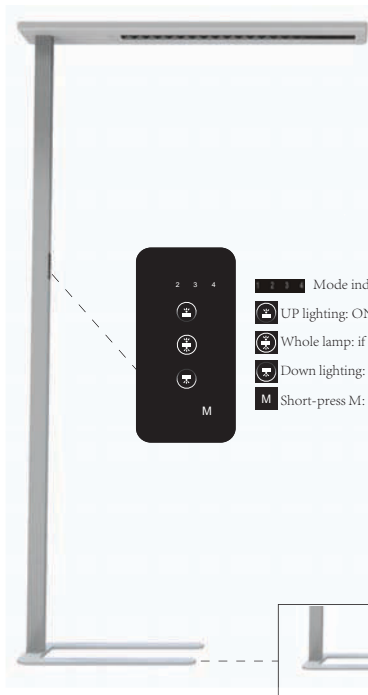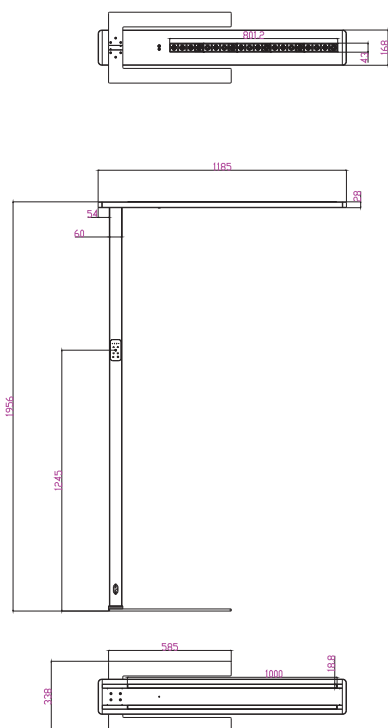

Cuttable strip lens with compact structure and screws are hidden

Rhombus optical lens for high light transmittance and excellent uniformity


Mode indicator

- 1 UP lighting: ON/OFF within short-press; brightness dimmable if long-press
- 2 Whole lamp: if short-press, ON/OFF for the whole lighting; long-press, brightness dimmable
- 3 Down lighting: ON/OFF if short-press; beightness dimming if long-press
- M Short-press M: Change different 1-2-3-4 modes


Simple design and excellent craftwork, appearance with rich texture; Stable and strong steel base, safe and reliable;



Light angle

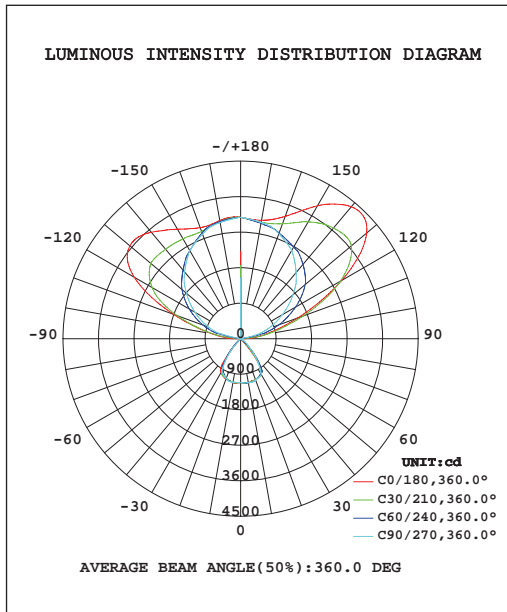

Light band

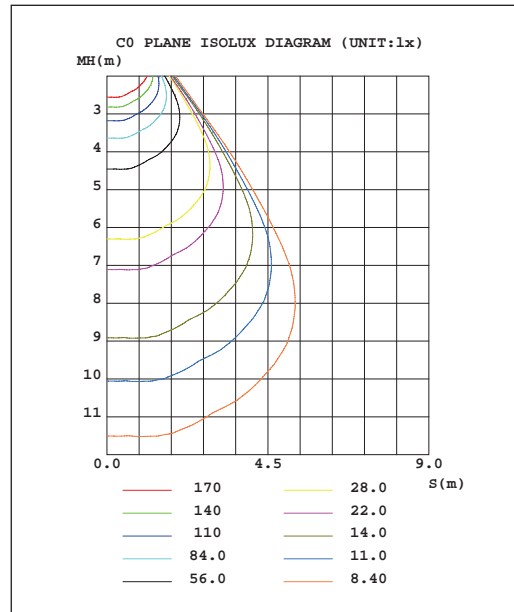

Technical data

Model Number	BR-FS0007-110W-B01
Size	1954*1184*338mm
Input Voltage	AC200-240V 100-270V
Lighting effcet	120LM/W
Input Power	110w
Luminous ratio	Indirect ↑ 87%; Direct ↓ 13%;
Power Factor	>0.9
Housing Color	RAL7038A(white/black available)
Luminous Flux	11500 lm indirect/1700lm direct
CRI (Ra>)	80
UGR	<16
Dimming type	PWM
Working Lifetime(Hour)	>36000
Lamp Body Material	Aluminum
Color Temperature	3000K/4000K/5000K/6000K
Protection Level	IP40
Working Temperature	-20°C~40°C
Application	office/conference room/reception
Light Source	SMD2835 / Everlight / SMD3030 / Philips
Certification	CE/ROHS/FCC
Surface Finished	Powder painting
Feature	Fashion brief
Beam angle	Indirect ↑ 125°; Direct ↓ 75°;
warranty	3years
Packaging size	2000*320*115mm
Outlet length	2m